

SPIN ON SEPARATORS



KELTEC
Technolab

(SPIN-ON) SEPARATOR




KELTEC	FIGURA	Dimensões em mm (Dimensions in inches)					Vazão: M ³ /Min Nominal flow rate (cfm)	ΔP Inicial* (ΔP Initial*)	T ⁹ C-W**	Pressão de colapso (Collapse Strength)		Vida útil estimada (Service life)
		D1	G1	G2	H1	H2				bar	mpa	
KD130-032P	1	128 (5.06)	1 1/2"-16 UNF	1/8"	279 (10.98)	276 (10.86)	2.2 (78)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD490-006	2	76 (2.99)	M22X1,5	-	127 (5.0)	-	1.1 (38.9)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD490-026	3	76 (2.99)	M23X1,75	-	127 (5.0)	-	1.1 (38.9)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD610-008	4	93 (3.66)	M24X1,5	-	212 (8.34)	-	2.2 (78)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD610-013	5	93 (3.66)	M23X1,5	-	212 (8.34)	-	2.2 (78)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD610-017	6	93 (3.66)	M24X1,75	-	212 (8.34)	-	2.2 (78)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD610-023	7	93 (3.66)	1-12 UNF	-	212 (8.34)	-	2.2 (78)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD610-025	8	93 (3.66)	M25X1,75-LH	-	212 (8.34)	-	2.2 (78)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD690-006	9	108 (4.25)	M32X1,5	-	260 (10.23)	-	4.4 (155.3)	≤ 0.30 bar	≤ 120°C	16	1.6	≤ 1-3ppmw 3000h / Δ1bar P
KD690-021	10	108 (4.25)	M32X1,75	-	260 (10.23)	-	4.4 (155.3)	≤ 0.30 bar	≤ 120°C	16	1.6	≤ 1-3ppmw 3000h / Δ1bar P
KD690-023	11	108 (4.25)	M32X1,5-LH	-	260 (10.23)	-	4.4 (155.3)	≤ 0.30 bar	≤ 120°C	16	1.6	≤ 1-3ppmw 3000h / Δ1bar P
KD710-009	12	136 (5.35)	M39X1,5	-	177 (6.96)	-	3.3 (116.5)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD75-043	13	76 (2.99)	M23X1,75	-	127 (5.0)	-	1.1 (38.9)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD900-018	14	136 (5.35)	M39X1,5	-	302 (11.88)	-	6.0 (211.8)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD900-043	15	136 (5.35)	1 1/2"-16 UNF	-	302 (11.88)	-	6.0 (211.8)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD900-048	16	136 (5.35)	M39X1,5-LH	-	302 (11.88)	-	6.0 (211.8)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD900-055	17	136 (5.35)	M39X1,75	-	302 (11.88)	-	6.0 (211.8)	≤ 0.30 bar	≤ 120°C	20	2.0	≤ 1-3ppmw 3000h / Δ1bar P
KD900-063	18	136 (5.35)	M40X1,5-LH	-	302 (11.88)	-	6.5 (229.5)	≤ 0.25 bar	≤ 120°C	19	1.9	≤ 1-3ppmw 3000h / Δ1bar P



(SPIN-ON) SEPARATOR

KELTEC
Tecnologia que gera economia

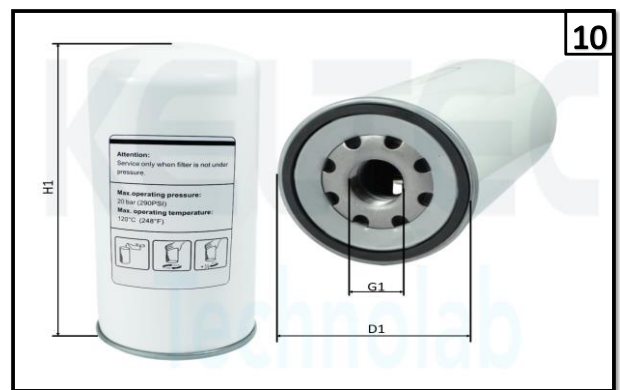

(SPIN-ON) SEPARATOR

KELTEC
Tecnologia que gera economia

