


ATLAS COPCO	KP DD,PD,UD,QD	Flow Rate (Nm ³ /min)	cfm (ft ³ /min)	D (mm)	d1 (mm)	L (mm)	H (mm)
7+	7X	0,42	14,83	Ø53	Ø72.5	98	61
15+	15X	0,9	31,78	Ø53	Ø72.5	143	106
25+	25X	1,5	52,97	Ø53	Ø72.5	195	158
45+	45X	2,7	95,35	Ø70	Ø92	215	165
75+	75X	4,5	158,92	Ø70	Ø92	300	250
110+	110X	6,6	233,08	Ø85	Ø120.5	323	250
145+	145X	8,7	307,24	Ø85	Ø120.5	393	320
180+	180X	10,8	381,4	Ø85	Ø120.5	463	390
240+	240X	14,4	508,53	Ø102	Ø143.5	503	413
300+	300X	18	635,66	Ø102	Ø143.5	596	506
360+	360X	20	706,29	Ø102	Ø143.5	596	506
430+	430X	26	918,18	Ø120	Ø165	695	590
525+	525X	32	1.130,07	Ø120	Ø165	810	705
630+	630X	40	1.412,59	Ø120	Ø165	1045	940

Precisão de Filtragem	Teor de Óleo Residual	Material / Meio Filtrante
KPDD: 1 µm	1 ppm	Micro fibra de vidro
KPPD: 0.01 µm	0.01 ppm	Micro fibra de vidro
KPQD: 0.01 µm	0.003 ppm	Carvão Ativado
KPUD: 0.01 µm	0.001 ppm	Micro fibra de vidro



ELEMENTOS COALESCENTES

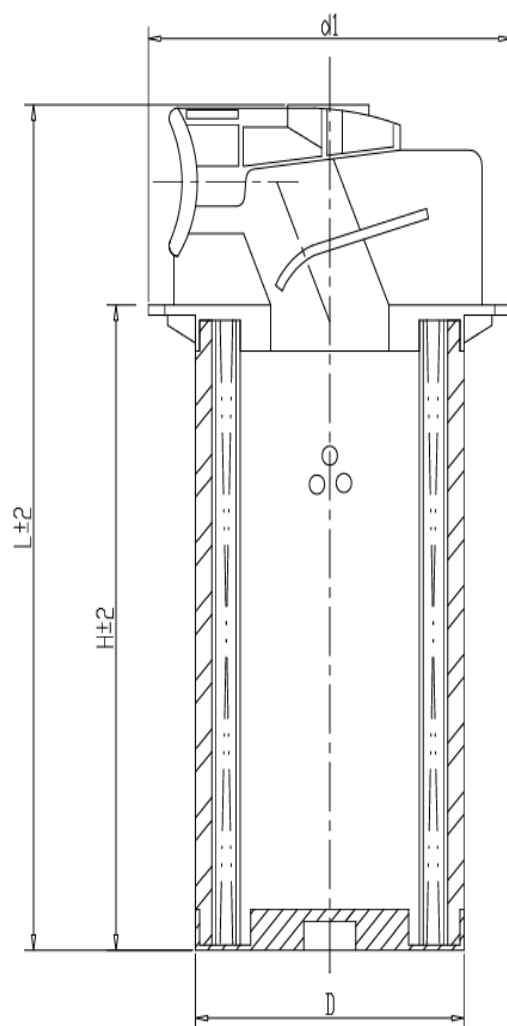

KPDD--X



KPPD--X



KPQD--X



KPUD--X



CAH-13DB

DRENO